

ifm electronic



# Automation Technology for the Machine Tools Industry *Catalogue 2014/2015*

[www.ifm.com/gb/machine-tools](http://www.ifm.com/gb/machine-tools)

**ifm** – close to you!



## ifm – Your partner for machine tools



The name ifm stands for a large range of different sensors and systems for automation technology worldwide.

For more than forty years the family-run company has been researching, developing and producing with the aim of optimising technical processes and conserving resources.

An extremely wide product range provides sufficient flexibility to meet customer requirements in the most varied industries: from an individual sensor and matching accessories to a complete system solution. Of course all relevant approvals are available.

As one of the global players, ifm guarantees worldwide availability of the units. More than 70 branch offices worldwide ensure competent advice on-site.

ifm – close to you!



<i>ifm – the company</i>	4 - 5	
<i>General information</i>	6 - 7	
<i>Machine tools</i>	8 - 31	
<i>ifm – worldwide addresses</i>	32 - 35	

## The company in your vicinity.



### State-of-the-art communication.


With the right address – [www.ifm.com](http://www.ifm.com) – only a mouse click separates you from the world of automation technology. See the power of our products in interactive representations. Gain an impression with 3-dimensional views of our units. Download CAD drawings for direct integration in your applications. Or order online in ifm's e-shop – fast, convenient and reliable.

### We are there for you.


Close contact with our customers is part of our success. Therefore we have consistently developed our sales network right from the start. Today the ifm group of companies is represented in more than 70 countries – close to you! With application advice and service at the heart of our operation. For the introduction of new products and technologies we support you with workshops and seminars in our training centres or in your plant.

### Security by success.

Since its foundation in 1969 ifm has constantly grown, now having more than 5000 employees worldwide, and achieved a turnover of more than EUR 630 million in 2013. This success gives you the security of having a reliable partner for the implementation of your automation projects. Comprehensive service and a warranty of 5 years on standard units are just two examples of this reliability.

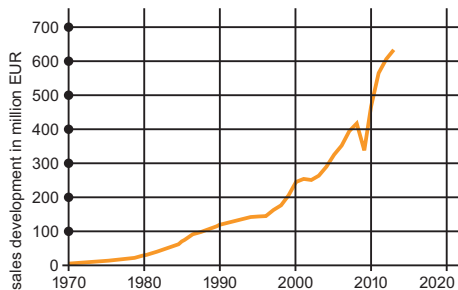

Turnover development since 1970.

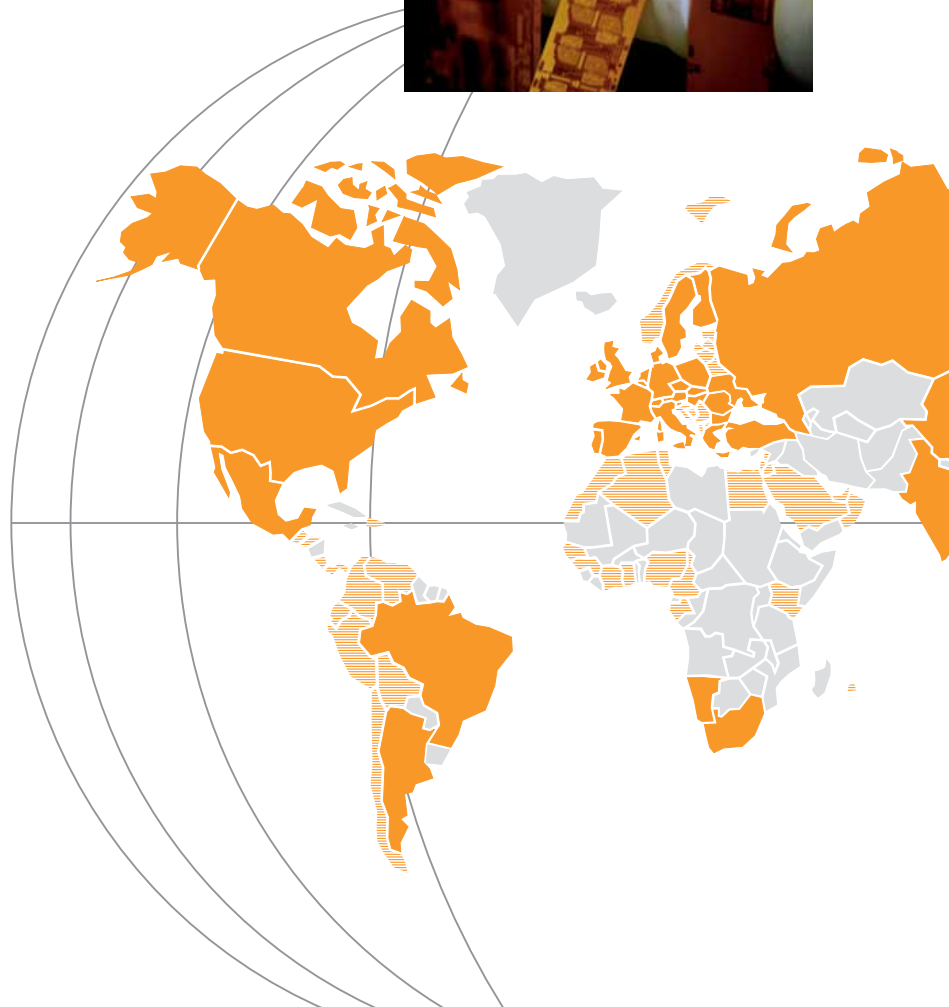

**Not only components.**

ifm stands for a large range of different sensors and systems for automation. Our range of more than 7,800 articles guarantees flexibility and compatibility. So there is always a reliable solution for your automation projects – from the individual sensor with practical accessories to the complete system.

**Availability guaranteed.**

Your deadlines matter to us. That is why we are constantly optimising our production processes in order to be able to quickly and flexibly produce large quantities at a constantly high quality – and to continue to shorten delivery times. Your order is dispatched via our centralised logistics centre reliably and on time.

**Quality as part of our philosophy.**


The quality standard of our products is an integral part of our company philosophy. And we guarantee it! So we provide you, the users, with a maximum degree of security: By means of our own production technology, ifm film technology, as well as by means of extensive quality assurance measures such as 100 % final testing. By quality we understand, for example, ecologically conscious production – Made in Germany!



*The development of innovative products is one of our core competences. From high-quality standard solutions to products specially tailored to the requirements of the individual industries – from mobile machines to the food industry.*

# www.ifm.com

## Information around the clock and around the globe in 23 languages on the internet.

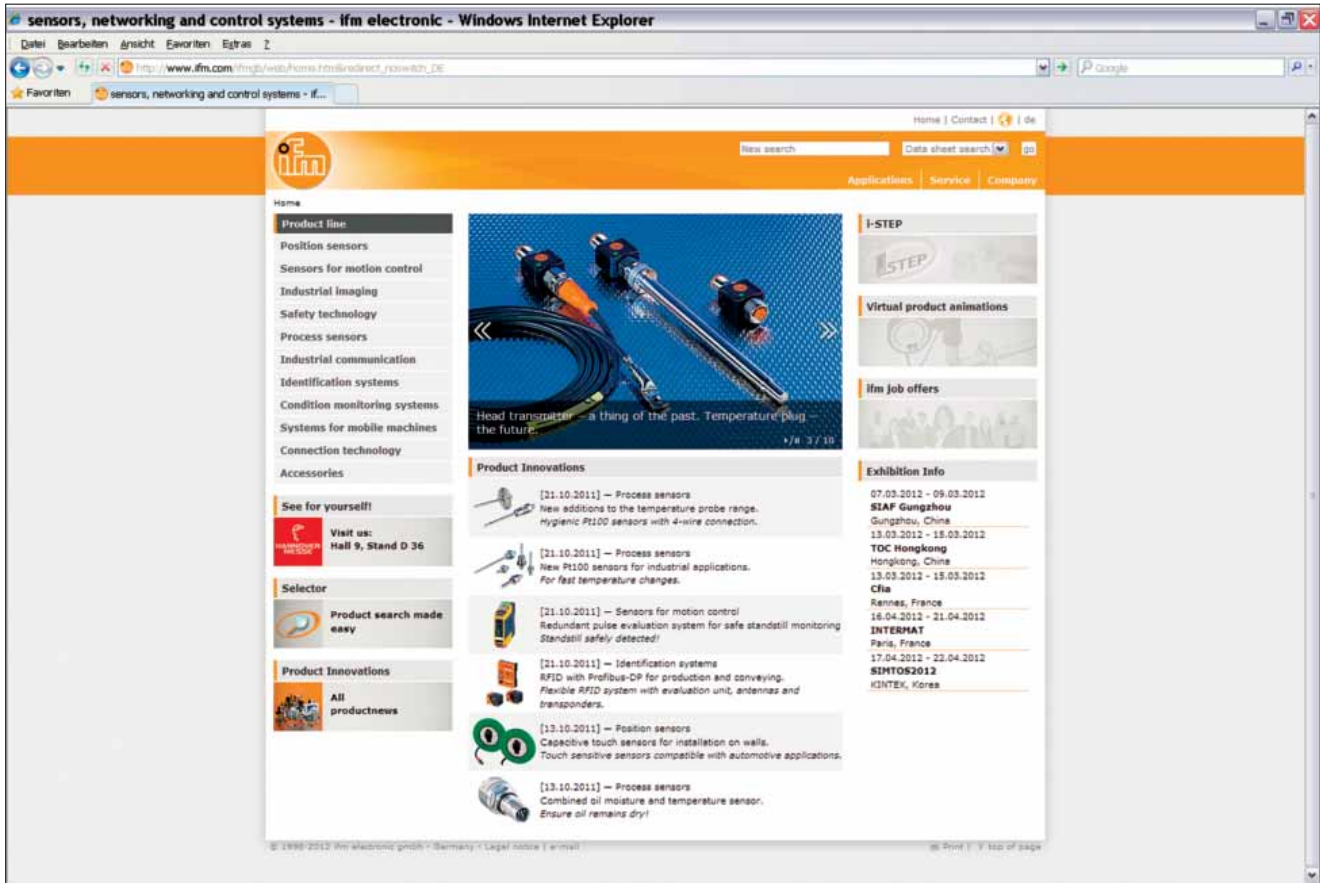

- **Information**

- product innovations
- company news
- exhibition info
- locations
- jobs

- **Documentation**

- data sheets
- operating instructions
- manuals
- approvals
- CAD data

- **Communication\***

- request for documents
- recall service
- live advice
- newsletter

- **Selection**

- interactive product selection aids
- configuration tools
- data sheet direct

- **Animation**

- virtual product animations
- flash movies (video sequences)

- **Application**


- applications
- product recommendations
- calculation aids

- **Transaction\***

- e-shop processing
- e-procurement catalogues

\*Some offered information is available country-specific

## Convenient order processing via the e-shop\*\* on the internet.

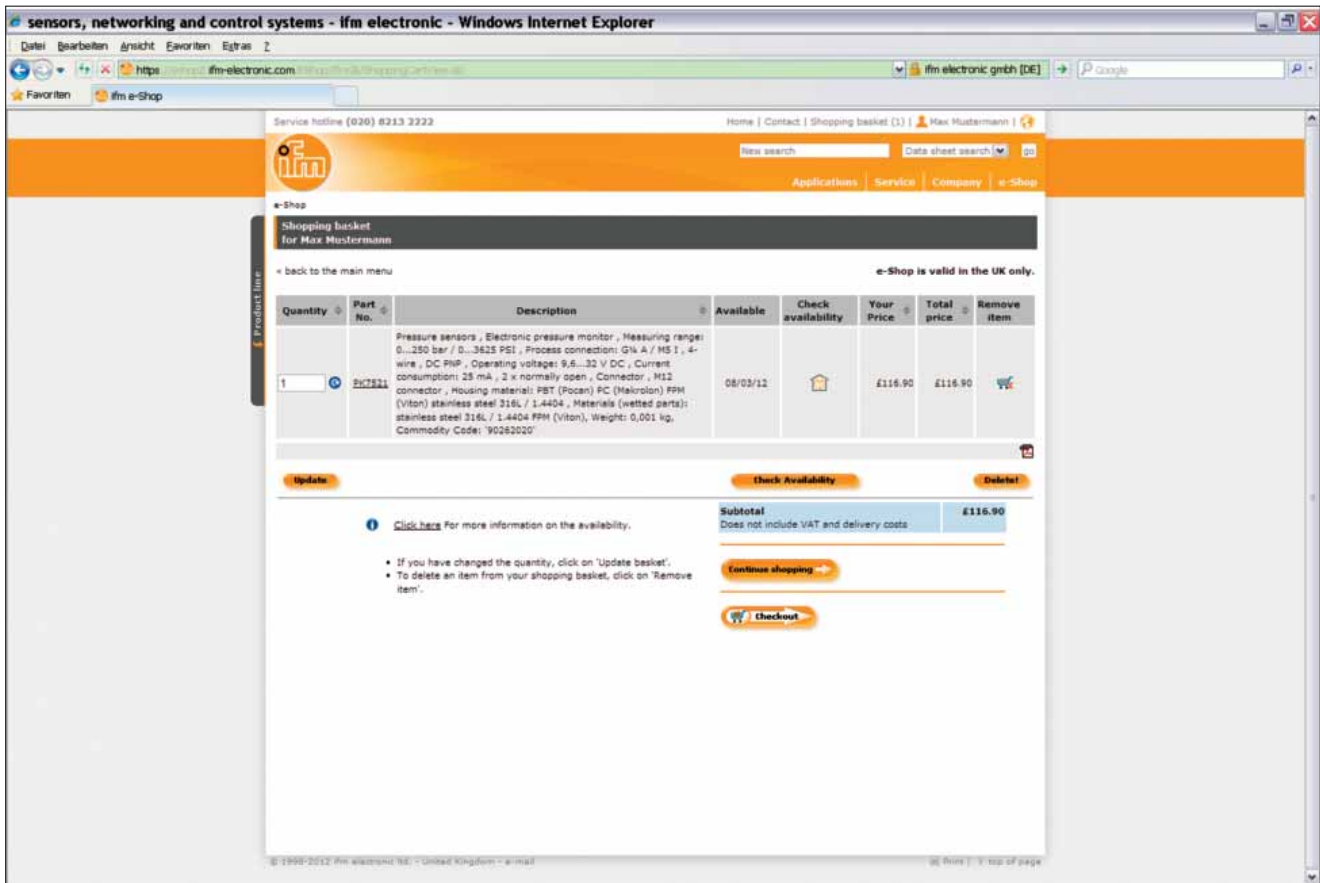

Secured authentication

Individual order history

Customer-related price indication

Convenient quick input form

Real time availability check

Simple order processing

Personal product favourites

Management of shipping addresses


Online parcel tracking

Confirmations by e-mail

\*\* Already available in many countries.




## Metal forming

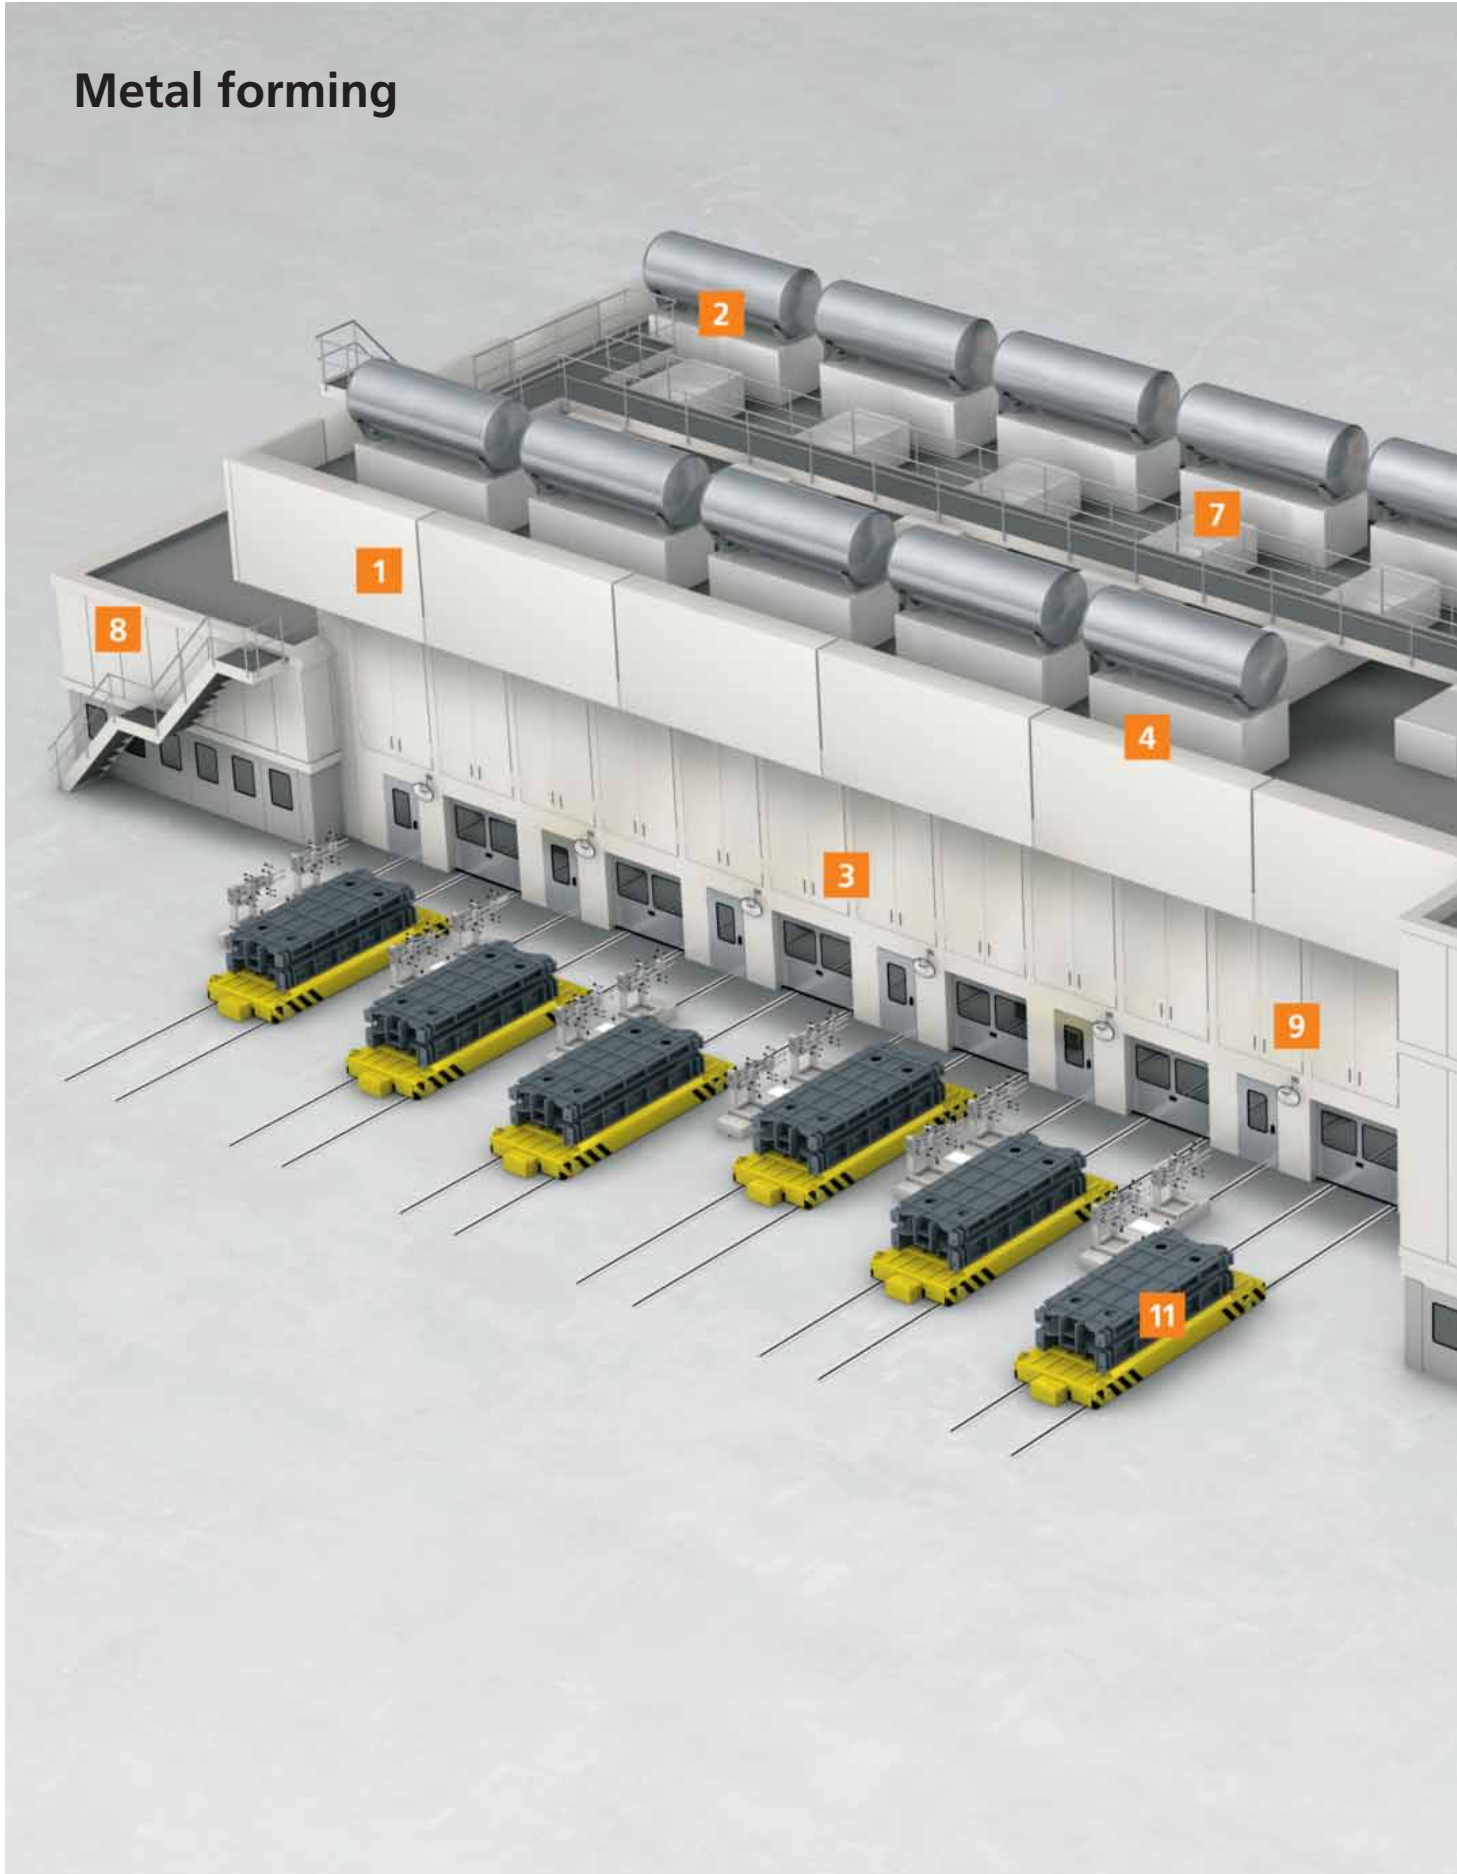





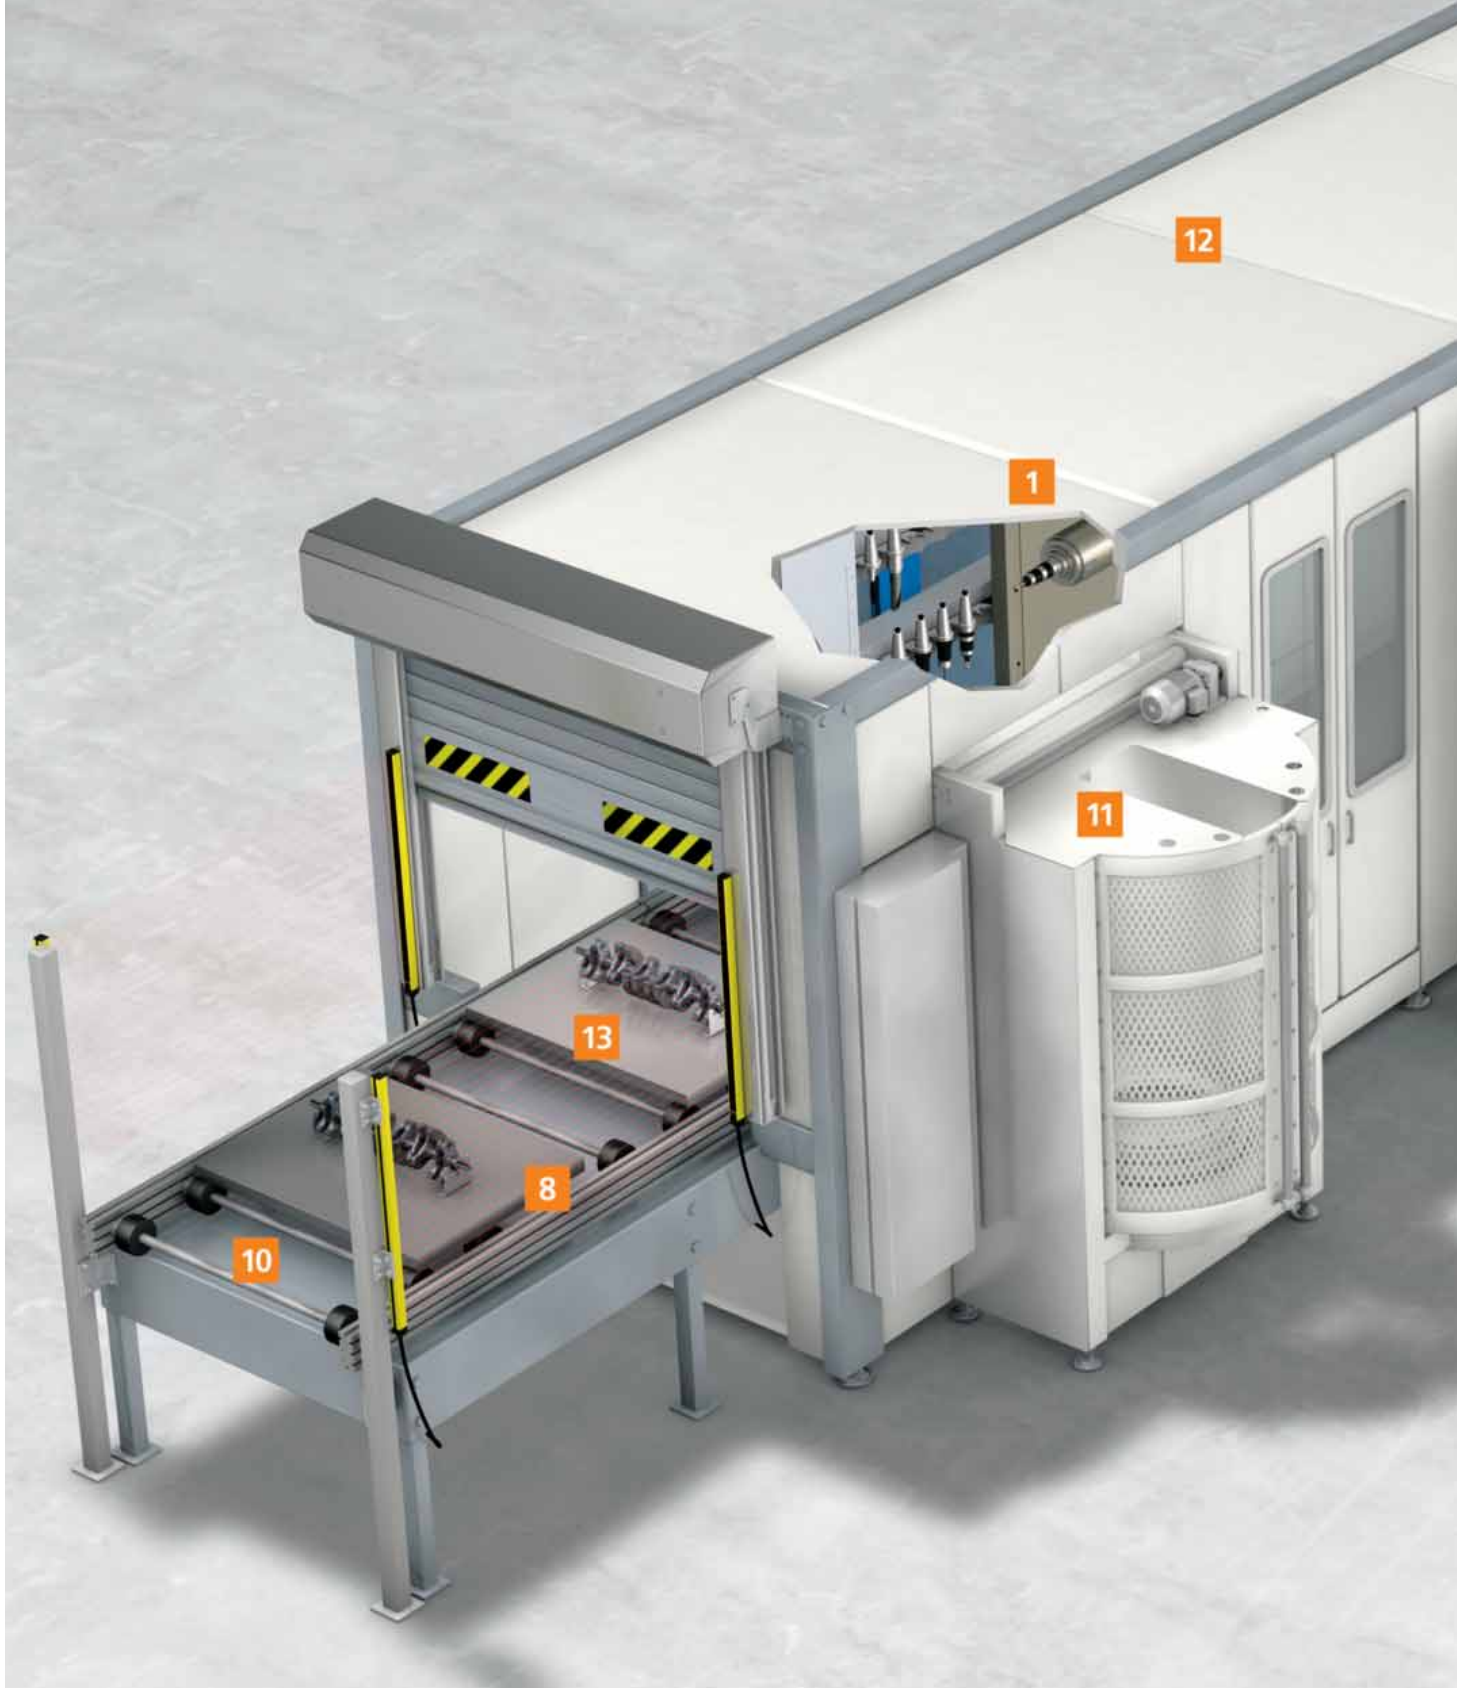



## Metal working





Machine	Application	Product group	From page
<b>1 Drives / spindles</b>			
	Monitoring of drives	Vibration monitoring systems	15
	Drill bit breakage monitoring on spindles	Vibration monitoring systems	15
	Internal cooling of drill	Flow sensors / flow meters	15
<b>2 Hydraulics</b>			
	Level monitoring in hydraulic power packs	Level sensors	16
	Temperature measurement in hydraulic power packs	Temperature sensors	16
	Pressure measurement on filters and axes	Pressure sensors	17
<b>3 Pneumatics</b>			
	Compressed air treatment	Pressure sensors	18
	Measurement of compressed air consumption	Flow sensors / flow meters	18
	Vacuum monitoring on grippers	Vacuum sensors	19
<b>4 Cooling</b>			
	Cooling in machines	Flow sensors / flow meters	20
	Suction of oil mist	Flow sensors / flow meters	20
	Fan monitoring	Vibration monitoring systems	20
<b>5 Coolants</b>			
	Hydrostatic pressure measurement	Pressure sensors	21
	Leakage detection	Level sensors	21
	Limit level detection	Level sensors	21
<b>6 Swarf / scrap disposal</b>			
	Swarf hopper monitoring	Laser sensors / distance measurement sensors	22
	Rotational speed monitoring	Pulse evaluation systems	22
	Position detection	Laser sensors / distance measurement sensors	22
<b>7 Lubrication</b>			
	Oil condition monitoring	Systems for oil quality monitoring	23
	Oil moisture measurement	Systems for oil quality monitoring	23
	Cycle detection on lubricant distributors	Inductive sensors	23

Machine	Application	Product group	From page
<b>8 Workpiece loading</b>			
	Finger protection	Safety light curtains	24
	Part detection	Fail-safe inductive sensors	24
	Protective opening of gantry robots	Fail-safe inductive sensors	24
<b>9 Part seat monitoring</b>			
	System solution for part seat monitoring	Pressure sensors	25
	Compressed air monitoring	Pressure sensors	25
	Differential pressure measurement	Pressure sensors	25
<b>10 Workpiece transport</b>			
	Position detection	Inductive sensors	26
	Part detection	Laser sensors / distance measurement sensors	26
	Position detection	Inductive sensors	26
<b>11 Tool changing system</b>			
	Position check of tool	Inductive sensors	27
	Tool identification	RFID 13.56 MHz	27
	Tool detection	Laser sensors / distance measurement sensors	27
<b>12 Energy efficiency</b>			
	Leakage detection	Flow sensors / flow meters	28
	Measurement of compressed air consumption	Flow sensors / flow meters	28
	Detection of water	Flow sensors / flow meters	28
<b>13 Part detection / quality control</b>			
	Quality assurance	Vision sensors	29
	Release for work step	Capacitive sensors	29
	Identification	1D/2D code readers	29
<b>14 Signal transmission</b>			
	Controllers and gateways	AS-Interface controllers / gateways	30
	Safe standstill monitor	Pulse evaluation systems	30
	Industrial communication	AS-Interface I/O modules	31

## Sensors and systems for machine tools



Machine tools are often used as diligent helpers in almost all manufacturing companies in this world.

The machine tool sector is divided into the main fields of cutting and forming (turning, milling, drilling, grinding, sawing) as well as joining machines.

These processes are divided into the 'wet'- i.e. flooded with coolant, – MQL (minimum quantity lubrication) and 'dry' working. ifm sensors can be used in all applications.

The topics "energy efficiency" and "quality assurance" are currently the focus of a lot of attention. Here again, ifm offers application-specific sensors at a favourable price / performance ratio.

## Drives / spindles

**Condition monitoring of drives**

VSA series sensors record the vibration levels of the drives, enabling condition-oriented maintenance.

## Vibration monitoring systems

Type	Description	Order no.
------	-------------	-----------



Vibration sensor · For connection to external diagnostic electronics · Connector · stainless steel 316L / 1.4404

VSA001

**Drill bit breakage monitoring on spindles**

VSA series sensors detect the spindle condition and the vibrations in the machine tool in case of a drill bit breakage.

## Vibration monitoring systems

Type	Description	Order no.
------	-------------	-----------



Vibration sensor · For connection to external diagnostic electronics · Cable with connector, screened · housing: stainless steel 316L / 1.4404

VSA002



Diagnostic electronics for vibration sensors · 4 sensor inputs 0...10 mA or IEPE · TCP/IP Ethernet interface · Frequency-selective machine monitoring of up to 4 measuring points · Integrated history memory with real-time clock · Counter function · Combicon connection · PA

VSE100

## Flow transmitters with non-return valve

Type	Process connection	Measuring range [l/min]	Medium temperature [°C]	Pressure rating [bar]	Response time [s]	U <sub>b</sub> [V]	Order no.
------	--------------------	----------------------------	----------------------------	--------------------------	----------------------	-----------------------	-----------



G ½

0.3...25

0..60

200

< 0.01

24

SBU623




## Hydraulics




## Monitoring hydraulic systems

LR and TR series sensors detect the level and the temperature. Any deviations from the target values are detected at once.

## Temperature sensors

Type	Measuring range [°C]	Process connection	Display LED	U <sub>b</sub> [V]	Current consumption [mA]	I <sub>load</sub> [mA]	Order no.
	-40...300	G ½ A	Display unit	18...32	50	250	TR7432

## Level sensors with guided wave radar


Type	Process connection	Probe length [mm]	Active zone [mm]	Inactive zone [mm]	U <sub>b</sub> [V]	Medium temperature [°C]	I <sub>load</sub> [mA]	Order no.
	G ¾ A	–	L-40 (L-60)	30 / 10 (30)	18...30	0...80	200	LR7000



## Oil recirculation pump station

The PG electronic contact manometer combines an easy-to-read manometer display with the advantages of an electronic pressure sensor.

## Pressure sensors in the circulating oil lubrication

Type	Process connection	Display LED	Measuring range [bar]	P <sub>overload</sub> max. [bar]	P <sub>bursting</sub> min. [bar]	U <sub>b</sub> DC [V]	Order no.
	G ½	Display unit	0...100	300	700	18...32	PG2452



## Hydraulics



## Filter monitoring

PNI-type electronic pressure sensors with an analogue input evaluate the pressure difference in filter elements in combination with PA-type transmitters.


## Differential pressure measurement with PNI and PA

Type	Process connection	Display LED	Measuring range [bar]	P <sub>overload</sub> max. [bar]	P <sub>bursting</sub> min. [bar]	U <sub>b</sub> DC [V]	Order no.
	G 1/4 I	Display unit	0...25	100	350	18...30	<b>PNI023</b>
	G 1/4 I	–	0...25	150	350	9.6...32	<b>PA3023</b>

Weight compensation Z axis  
(in general "vertical" axes)

A hydraulically generated primary pressure compensates the weight of the vertical axes so that the axis drives consume an almost identical amount of energy.

## Pressure sensors


Type	Process connection	Display LED	Measuring range [bar]	P <sub>overload</sub> max. [bar]	P <sub>bursting</sub> min. [bar]	U <sub>b</sub> DC [V]	Order no.
	G 1/4 I	Display unit	0...100	300	650	18...36	<b>PN7002</b>

## Pneumatics

**Maintenance unit**

The PK6524 pressure sensors monitor the correct working pressure in the compressed air supply. The SD6000 compressed air meter determines the consumption.


## Pressure monitoring with PK sensor

Type	Process connection	Display	Measuring range	P <sub>overload</sub>	P <sub>bursting</sub>	U <sub>b</sub> DC	Order no.
		LED	[bar]	max. [bar]	min. [bar]	[V]	
	G ¼ male / M5 female	Operation	0...10	25	300	9.6...32	<b>PK6524</b>


**Compressed air treatment for the purging air**

The overpressure of the purging air inside spindles and distance measurement devices prevent unintended penetration of cooling lubricants.

## Pressure sensors

Type	Process connection	Display	Measuring range	P <sub>overload</sub>	P <sub>bursting</sub>	U <sub>b</sub> DC	Order no.
		LED	[bar]	max. [bar]	min. [bar]	[V]	
	G ¼ I	Display unit	-1...10	75	150	18...36	<b>PN5004</b>

## Compressed air meter for the measurement of compressed air consumption


Type	Process connection	Setting range	Pressure rating	Response time	U <sub>b</sub>	Order no.
		[Nm <sup>3</sup> /h]	[bar]	[s]	[V]	
	G ¼ (DN8)	0.12...15.00	16	< 0.1	18...30	<b>SD5000</b>

## Pneumatics


**Vacuum sensors monitor the suction grippers**

PN7 series vacuum sensors detect the required vacuum for operating the suction grippers.

## Vacuum sensors

Type	Process connection	Display	Measuring range	P <sub>overload</sub>	P <sub>bursting</sub>	U <sub>b</sub> DC	Order no.
		LED	[bar]	max. [bar]	min. [bar]	[V]	
	G 1/4 I	Display unit	-1...1	20	50	18...36	PN7009


## Connectors

Type	Cable	Wire specification	Material housing / nut	U	T <sub>a</sub>	Pro-tection	LEDs	Order no.
				[V]	[°C]			
	10 m black PUR cable	4 x 0.34 mm <sup>2</sup> , Ø 4.9 mm	TPU / Brass	250 AC 300 DC	-25...90	IP 65 / IP 67 / IP 68 / IP 69K	-	EVC006

**Leakage detection in compressed air systems**

The SD type compressed air meters continuously detect the consumption of the treated compressed air. Actual / target comparisons ensure early detection of leakage.

## Compressed air meter for the measurement of compressed air consumption

Type	Process connection	Setting range	Pressure rating	Response time	U <sub>b</sub>	Order no.
		[Nm <sup>3</sup> /h]	[bar]	[s]	[V]	
	R1/2 (DN15)	0.6...75.0	16	< 0.1	18...30	SD6000


## Cooling




## Cooling with fluids

The SU flow meter monitors the flow and the temperature of the media. If oil is used in the working space, the oil mist has to be sucked away.

## Flow meters

Type	Process connection	Measuring range [l/min]	Medium temperature [°C]	Pressure rating [bar]	Response time [s]	U <sub>b</sub> [V]	Order no.
	G1	0.2...100.0	-10...80	16	< 0.250	19...30	SU8000

## Flow sensors for machine suction


Type	Setting range liquids / gases [cm/s]	Greatest sensitivity [cm/s]	Medium temperature [°C]	Response time [s]	Max. T <sub>0</sub> gradient [K/min]	Pressure rating [bar]	Order no.
	3...300 / 200...2000	3...60 / 200...800	-20...60	1...10	15	300	SF311A



## Fan monitoring on oil coolers

The oil is cooled to a defined value. The VKV vibration monitor to DIN ISO 10816 detects any damage to the rotating parts in the fan system.

## Vibration monitoring systems


Type	Description	Order no.
	Vibration monitor · Connection via M12 connector · Vibration monitor to DIN ISO 10816 · Measuring range RMS: 0...25 mm/s · Switching outputs: normally closed and analogue 4...20 mA · Housing materials: PBT / PC / FPM / stainless steel 316L / 1.4404	VKV021

## Coolants


**Level monitoring in coolant tanks**

The coolant level in tanks can be continuously monitored by LMT or the PA hydrostatic pressure sensor.

## PA pressure sensor

Type	Process connection	Display	Measuring range	P <sub>overload</sub>	P <sub>bursting</sub>	U <sub>b</sub> DC	Order no.
		LED	[bar]	max. [bar]	min. [bar]	[V]	
	G 1/4 I	–	0...0.25	10	30	9.6...32	PA3028


## LMT point level sensor

Type	Process connection	Process pressure max.	Application	Protection	Order no.
		[bar]			
	G 1/2 A	-1...40	liquid, viscous and powdery media	IP 68 / IP 69K	LMT121

**Overflow and leakage prevention**

The LI214x level sensor reliably monitors if any coolant escapes from the pipes and tanks through leaks.

## Level sensors (to section 19 of the German Federal Water Act WHG)


Type	Probe length	Output	U <sub>b</sub>	Medium temperature water	Medium temperature oil	I <sub>load</sub>	Order no.
	[mm]		[V]	[°C]	[°C]	[mA]	
	132	Normally closed	10...36	0...35	0...65	200	LI2141

## Swarf / scrap disposal

**“Full” detection for swarf hoppers**

The O1D photoelectric sensor uses the analogue output to the controller to detect the level in the swarf hopper. Both long swarf and short-chipping swarf are detected.


## PMD photoelectric sensors for detecting the loading condition

Type	Operating principle	Range	Sampling rate [Hz]	Spot Ø at max. range [mm]	U <sub>b</sub> [V]	Order no.
	Photoelectric distance sensor	0.2...10 m	1...33	< 15 x 15	18...30	<b>O1D105</b>
	Photoelectric distance sensor	0.3...6 m	1...33	< 8 x 8	18...30	<b>O1D155</b>


**Removal of scrap bales**

The O5D photoelectric distance sensor detects if the conveyor belt is clear. The compact DIA speed monitor detects the pulses of the conveyor driveshaft.

## PMD distance sensors with time of flight measurement for detecting the loading condition

Type	Operating principle	Range	Sampling rate [Hz]	Spot Ø at max. range [mm]	U <sub>b</sub> [V]	Order no.
	Background suppression	0.03...2 m	33	< 5	10...30	<b>O5D100</b>

## Compact speed monitors for checking the conveyor


Type	U <sub>b</sub> [V]	In-puts	Input function	Setting range [puls. / min.]	Setting range [Hz]	Out-puts analog	Out-puts relays	Out-puts transist.	Order no.
	10...36 DC	1	PNP	5...300	15000	–	2	1	<b>DI5009</b>

## Lubrication


**Oil condition monitoring in circulating lubrication systems**

LDP detects smallest particles in the oil. The oil is filtered in recirculating pump stations. In addition, LDH100 continuously checks the water content in the oil and the temperature.

**Oil particle sensor**

Type	Process connection	Process pressure max. [bar]	Application	Protection	Order no.
	Minimes M16 x 2	–	Mineral oils (e.g. HLP), ester oils (e.g. HEES), biodegradable oils (e.g. HETG)	IP 67	<b>LDP100</b>


**Oil moisture sensor**

Type	Process connection	Process pressure max. [bar]	Application	Protection	Order no.
	G 3/4	10	Mineral oils, synthetic esters, biodegradable oils, air	IP 67	<b>LDH100</b>

**Principle of central lubricating system for grease**

The distributor supplies the connected points of lubrication, one after the other, with the lubricant in exactly defined quantities. The complete cycle is monitored by the IR5041 piston detector.


**Cycle detection on progressive distributors with piston detector**

Type	Dimensions [mm]	Sensing range [mm]	Material	U <sub>b</sub> [V]	Protection	f [Hz]	I <sub>load</sub> [mA]	Order no.
	–	1.5 f	steel (1.7225)	10...36	IP 67	100	100	<b>IR5041</b>

f = flush / nf = non flush




## Workpiece loading

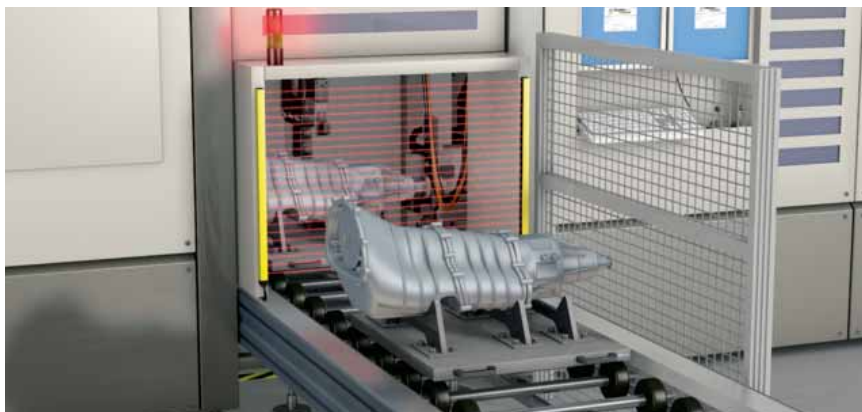**Access prevention of loading openings on roller tracks**

OY series safety light curtains restrict unauthorised access to accessible areas such as the loading zones. They correspond to type 4, in accordance with EN 61496.


## Safety light curtains for access prevention

Type	Sensor length [mm]	Resolution / detection capacity [mm]	Protected area height [mm]	Protected area width [m]	Response time [ms]	U <sub>b</sub> [V]	Order no.
	1263	14	1210	0...3 / 1...6	16.5	24	OY0085

**Protection of loading openings for gantry robots**


Category 4 and SIL 3 contactless inductive safety sensors directly detect the safe position of gantry robots – without requiring a special target.

## Inductive fail-safe sensors to protect the loading opening

Type	Length [mm]	Enable zone [mm]	Housing material	U <sub>b</sub> DC [V]	Protection	Response time in case of a safety request / enable time [ms]	Order no.
	66	4...20 nf	PPE	24	IP 65 / IP 67	≤ 50 / ≤ 200	GM7055

f = flush / nf = non flush

## Connectors

Type	Cable	Wire specification	Material housing / nut	U [V]	T <sub>a</sub> [°C]	Pro- tection	LEDs	Order no.
	10 m black PUR cable	4 x 0.34 mm <sup>2</sup> , Ø 4.9 mm	TPU / Brass	250 AC 300 DC	-25...90	IP 65 / IP 67 / IP 68 / IP 69K	–	EVC003


## Part seat monitoring



### System solution for part seat monitoring

The workpieces to be processed must lie flat to ensure dimensional accuracy. The PS7 control unit detects any contamination due to swarf or abrasion.

### Control unit for part seat monitoring


Type	Description	Order no.
	Control unit for part seat monitoring · Setting by adjustment of the pneumatic bridge · Integrated pressure sensor with 2 switching outputs · and 4-digit alphanumeric display for trend display or display of current pressure · Cable	PS7570




### Part seat monitoring of workpieces by means of differential pressure measurement

All bore holes are covered when the workpiece is correctly seated. The minimum differential pressure determined is the reference value.

### Differential pressure measurement with PNI and PA


Type	Process connection	Display LED	Measuring range [bar]	Poverload max. [bar]	Pbursting min. [bar]	U <sub>b</sub> DC [V]	Order no.
	G ¼ I	Display unit	0...10	50	150	18...30	PNI024
	G ¼ I	–	0...10	75	150	9.6...32	PA3024

## Workpiece transport

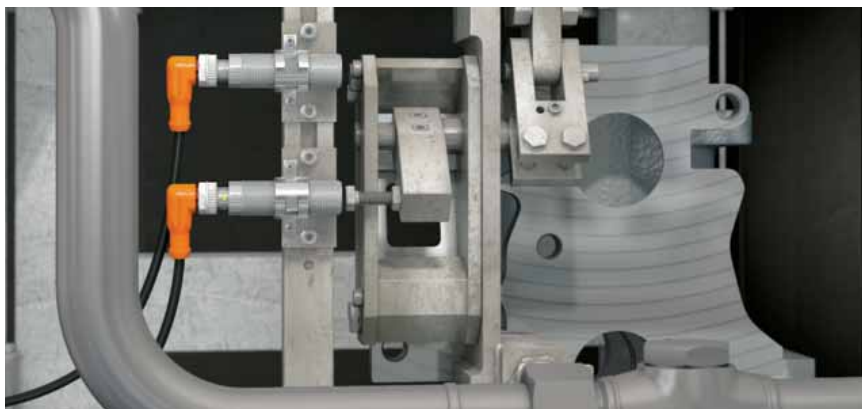**Full-metal sensors for use in machining**

For reasons of weight, many components are manufactured from aluminium alloys. Full-metal inductive sensors with correction factor  $K = 0$  are unaffected by aluminium swarf.

Full-metal inductive sensors with correction factor  $K = 0$ 


Type	Dimensions [mm]	Sensing range [mm]	Material	$U_b$ [V]	Protection	f [Hz]	$I_{load}$ [mA]	Order no.
	M18 / L = 70	4.5 f	High-grade st. steel	10...36	IP 68	100	100	IGC249

f = flush / nf = non flush


**Detection of workpiece carriers and workpieces in series connections**

IM5123 inductive sensors detect the position of the workpiece carriers on accumulating conveyors. The OID photoelectric sensors signal if they are occupied.

## PMD photoelectric sensors for detecting the loading condition

Type	Operating principle	Range	Type of light	Spot Ø at max. range [mm]	Output H = light-on D = dark-on	Order no.
	Background suppression	0.03...2 m	Red	< 5	2 switching outputs normally open / closed complementary PNP	OID200

## Inductive sensors for determining position

Type	Dimensions [mm]	Sensing range [mm]	Material	$U_b$ [V]	Protection	f [Hz]	$I_{load}$ [mA]	Order no.
	40 x 40 x 54	20 f	PA (polyamide)	10...36	IP 67	100	200	IM5123

f = flush / nf = non flush


## Tool changing system




### Inductive sensors detect the position of interchangeable tools

The IDC rectangular inductive sensors detect the position of the workpiece on the positioning table for automatic locking.

#### Inductive sensors

Type	Dimensions [mm]	Sensing range [mm]	Material	U <sub>b</sub> [V]	Protection	f [Hz]	I <sub>load</sub> [mA]	Order no.
	92 x 80 x 40	50 f	PPE	10...36	IP 67	70	250	ID5058


f = flush / nf = non flush

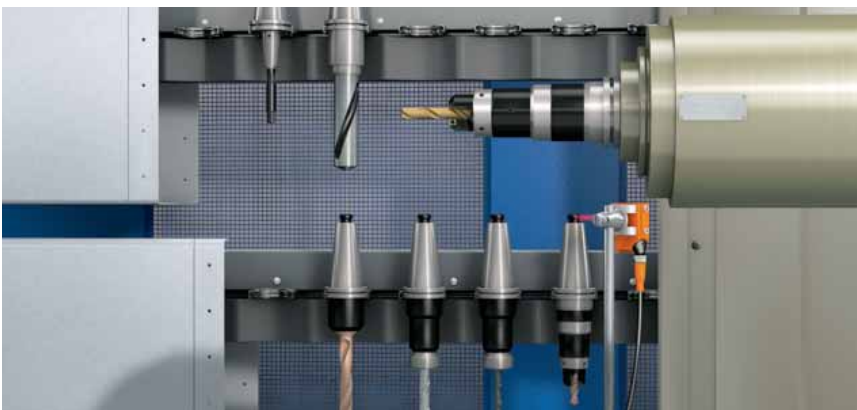


### Detection of interchangeable tools

The tools are retrieved from the magazine via RFID detection. The O5D photoelectric sensors detect if the selected tool is present in the fixture.


#### Photoelectric sensors for position control of tools

Type	Operating principle	Range	Type of light	Spot Ø at max. range [mm]	Output H = light-on D = dark-on	Order no.
	Background suppression	0.03...2 m	Red	< 5	2 switching outputs normally open / closed complementary PNP	O5D100

#### Read / write head for the RFID system



Type	Description	Order no.
	Read/write head · M12 connector · Housing materials: housing: stainless steel / Top: PPS	ANT410
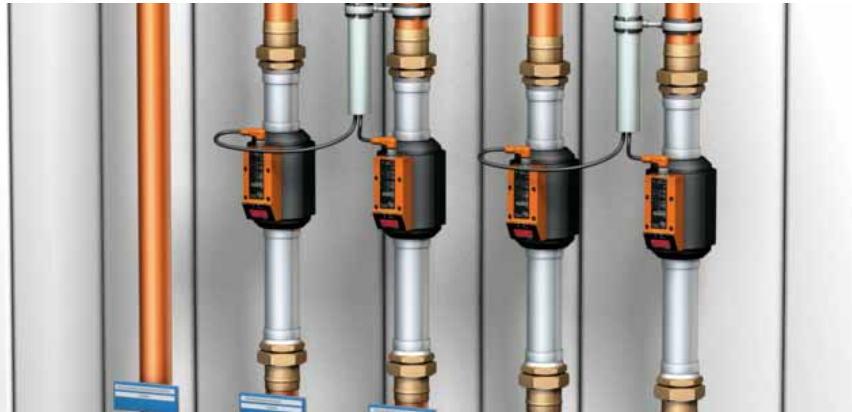
## Energy efficiency

**Detection of compressed air in main supply lines**

Here, SD2000 compressed air meters detect both the consumptions at normal pressure (6 bar) as well as in the high-pressure system (12 bar). Consumption is recorded and any leaks detected.


## Compressed air meters for consumption measurement and leakage detection

Type	Process connection	Setting range [Nm <sup>3</sup> /h]	Pressure rating [bar]	Response time [s]	U <sub>b</sub> [V]	Order no.
	R2 (DN50)	5...700	16	< 0.1	18...30	SD2000
	R1½ (DN40)	3.5...410.0	16	< 0.1	18...30	SD9000


**Detection of water**

The SM flow meter detects flow and temperature. Alarm signals can be given and the quantity can be counted via pulses (water meter) using the pre-set counter.

## Flow meters for consumption measurement

Type	Process connection	Setting range [Nm <sup>3</sup> /h]	Pressure rating [bar]	Response time [s]	U <sub>b</sub> [V]	Order no.
	G2 flat seal	6.5...300	16	< 0.35	18...32	SM9000
	G2 flat seal	8...600	16	< 0.35	18...32	SM2000


## Part detection / quality control

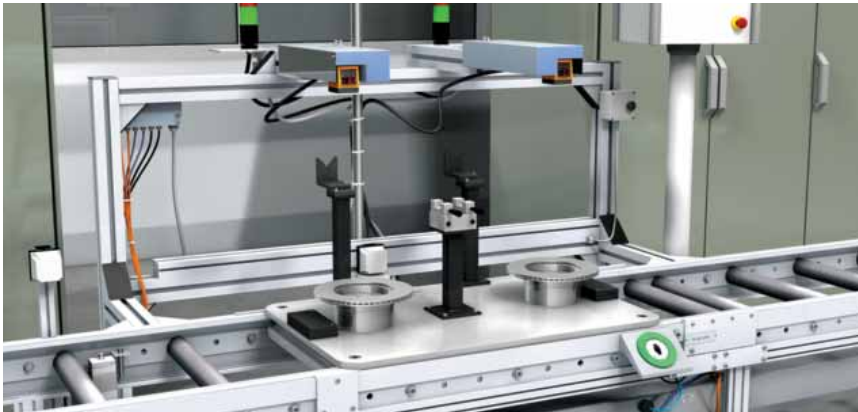


## Quality inspection of components

ifm vision sensors monitor if all holes to be bored are present in the component. The next machining step is only enabled if this is correct.

## Vision sensors in quality assurance

Type	Operating principle	Max. field of view size [mm]	Resolution [mm]	Detection rate [Hz]	Type of light	Ambient temperature [°C]	Order no.
	CMOS image sensor B/W, VGA resolution 640 x 480	1320 x 945	0.3	10	Infrared	-10...60	O2D222

## Touch sensor


Type	U <sub>b</sub> [V]	I <sub>load</sub> [mA]	Current consumption [mA]	Ambient temperature [°C]	Protection	Order no.
	24	500	30	-40...85	IP 67 / IP 69K	KT5002



## Identification of components

Components are coded with a production date and batch information to ensure traceability. This information is then read and verified by the O2I code reader.

## Multi-code reader for identifying codes

Type	Dimensions [mm]	Max. field of view size [mm]	Type of light LED	Motion speed int. / ext. lighting [m/s]	Process interface	Order no.
	60 x 42 x 53.5	132 x 94	red light	3 / 5	Ethernet TCP/IP, EtherNet/IP, RS-232	O2I102

## Signal transmission




### Controllers and gateways

The controller controls the communication in AS-i networks.

Gateways provide a connection from the AS-i to the higher-level bus system.

### Controllers, gateways


Type	Number of AS-i masters	Description	Order no.
	1	AS-i Ethernet / IP Controller E · Full master functions · Graphic display · Housing materials: aluminium / steel sheet galvanised	AC1327
	2	AS-i Ethernet / IP Controller E · Full master functions · Graphic display · Housing materials: aluminium / steel sheet galvanised	AC1337



### Access protection on rotating parts

Using sensor inputs the DA101S safety relay detects if rotating machine parts have actually stopped after a braking process.

### Evaluation systems for safe standstill monitoring



Type	U <sub>b</sub> [V]	In-puts	Input function	Setting range [puls. / min.]	Setting range [Hz]	Out-puts analog	Out-puts relays	Out-puts transist.	Order no.
	24 DC	1	PNP	–	0.2 / 0.5 / 1.0 / 2.0	–	2	1	DA101S
	24 DC	1	PNP	–	0.2 / 0.5 / 1.0 / 2.0	–	2	1	DA102S

## Signal transmission

**Intelligent wiring of machines and systems**

AS-Interface simplifies the electrical installation, reducing the amount of parallel wiring traditionally used for sensors and actuators.


## AS-Interface E/A Module

Type	Description	Order no.
	Active CompactLine module · 60 x 152 x 27 · IR addressing possible · Sockets M12 x 1 · Housing materials: PA / socket: Brass nickel-plated / threaded inserts in the lower part: Brass nickel-plated / O-Ring : FKM / Piercing contacts: CuSn6 surface nickel and tin-plated	AC2412
	Active CompactLine module · IR addressing possible · External sensor supply PELV · Sockets M12 x 1 · Housing materials: PA / socket: Brass nickel-plated / threaded inserts in the lower part: Brass nickel-plated / O-Ring : FKM / Piercing contacts: CuSn6 surface nickel and tin-plated	AC2466


**Sensors with IO-Link functionality**

The data and parameters are saved to the memory plug. If sensors are replaced, the parameters of the new device do not have to be reset.

## IO-Link memory plug – data storage in miniature format

Type	Description	Order no.
	Memory plug · Parameter memory for IO-Link sensors · Storage capacity: 2 Kbytes · Housing materials: PA PACM 12 / PET / sealing: FPM / nut: stainless steel 316L / 1.4404 / connector: TPU	E30398

## AS-Interface E/A Module

Type	Description	Order no.
	Active ClassicLine module · 2 IO-Link ports · For the connection of IO-Link sensors and actuators, binary sensors and binary actuators · Addressing socket · Three orientations of the flat cable are possible · Only for operation with AS-i masters with the profile M4 · Housing materials: PA / Piercing contacts: CuSn6 surface nickel and tin-plated	AC5225



**Algeria**

**Sarl AMS Algérie - Automatismes  
Motorisation & Services**  
Lotissement C, lot n°190 B  
Draria - 16000 ALGER  
Tél: +213 (0)5 59 43 45 22  
+213 (0) 23 26 41 45  
Fax: +213 (0)23 26 42 58  
contact@amsalgérie.com  
www.amsalgerie.com/

**Argentina**

**ifm electronic s.r.l.**  
Lola Mora 421  
10° piso, oficina 3  
1107 - Puerto Madero  
Ciudad Aut. Buenos Aires, Argentina  
Teléfono/Fax: +54 (011) 5353-3436  
Interior del país: 0810-345-3436  
info.ar@ifm.com  
www.ifm.com/ar

**Australia**

**ifm efector pty ltd.**  
PO Box 479  
Suite 3, 745 Springvale Road  
Mulgrave VIC 3170  
Tel. 1300 365 088  
Fax 1300 365 070  
sales.au@ifm.com  
www.ifmefector.com.au

**Austria**

**ifm electronic gmbh**  
Wienerbergstraße 41  
Gebäude E  
1120 Vienna  
Tel. +43 / 1 / 617 45 00  
Fax +43 / 1 / 617 45 00 10  
info.at@ifm.com  
www.ifm.com/at

**Bangladesh**

**Sensotec Automation**  
Red Crescent Chamber  
87, Motijheel Commercial Area  
Dhaka 1000  
Bangladesh  
Tel. +880 171 546 890  
sensotec@agni.com

**Belarus**

**ifm electronic spol.s.r.o.**  
U Křížku 571  
252 43 Průhonice  
Česká republika  
Tel. +420 / 2 / 67 990 222  
Fax +420 / 2 / 67 750 180  
svetlana.stolnaja@ifm.com  
www.ifm.com/cz

**Belgium and Luxembourg**

**ifm electronic n.v./s.a.**  
Zuiderlaan 91 - B6  
B - 1731 Zellik  
Tel. +32 2 481 0220  
Fax +32 2 463 1795  
info.be@ifm.com  
www.ifm.com/be

**Bolivia**

**BAVARIA S.R.L. Álvaro Baptista  
Vargas**  
Zona Morocollo, Urb. Santos Pariamo  
C. Mario Diaz de medina (26-A), Nr. 32  
La Paz - Bolivia  
Tel.: 00-591-2-277 13 78  
Mobile: 00-591-720-47 442  
alvarobaptista@bavaria.bo  
www.bavaria.bo

**Brazil**

**ifm electronic Ltda.**  
Rua Eleonora Cintra, 140  
Jardim Analia Franco  
03337-000 São Paulo/SP  
Tel. +55-11-2672-1730  
Fax +55-11-2673-3501  
info.br@ifm.com  
www.ifm.com/br

**Bulgaria**

**ifm electronic eood**  
1202 Sofia  
ul. Klokochnica No 2A  
Business Centre IVEL  
fl.4, office 17  
Tel. +359 2 807 59 69  
Fax +359 2 807 59 60  
info.bg@ifm.com

**Canada**

**ifm efector Canada Inc.**  
2233 Argentia Road, Suite 104  
Mississauga, ON L5N 2X7  
Tel.: 905-412-6250  
Fax: 905-363-0563  
info.ca@ifm.com  
www.ifm.com/ca

**Chile**

**Electronica Industrial  
Schädler y Cia. Ltda.**  
Av. Antonio Varas 1871  
Providencia  
6641545 Santiago  
Tel. +56 / 2 / 274 74 30  
Fax +56 / 2 / 204 93 38  
info@schadler.com  
www.schadler.com

**China**

**ifm electronic (Shanghai) Co., Ltd**  
Building 15,  
No. 1000, Zhangheng Road,  
Pu Dong District.  
201203 Shanghai, P.R.China  
Tel.: +86 21 3813 4800  
Fax: +86 21 5027 8669  
400 National Service Hotline:  
400 880 6651  
Involving: Contact quotation, Product  
delivery, Technical support, etc  
info.cn@ifm.com  
www.ifm.com/cn  
**ifm electronic (HK) Ltd**  
Unit 2106, 21/F,  
Tower 2, Metroplaza  
No. 223 Hing Fong Road,  
Kwai Chung,  
N.T., Hong Kong.  
info.hk@ifm.com  
www.ifm.com/hk  
**ifm electronic (Taiwan) Limited**  
2C, Bao-Cheng Enterprise Tower,  
No. 6 Mincyuan Second Road, Cianjhen  
District, Kaohsiung City,  
Postal Code 806, Taiwan, R.O.C.  
Tel.: +886-7-335-7778  
Fax: +886-7-335-6878  
info.tw@ifm.com  
www.ifm.com/tw

**Columbia**

**SENSOMATIC Y CIA LTDA.**  
CALLE 1 C 25a - 50  
BOGOTA D.C. COLOMBIA  
Tel. +57 313 430 2264  
Tel. +57 1 407 96 96  
info@sensomatic-ltda.com  
www.sensomatic-ltda.com

**Costa Rica**

**Gen Bus S.A**  
Santa Rosa, Sto. Domingo, Heredia.  
Bodegas Del Sol, Bodega No. 22  
COSTA RICA  
Tel. + (506) 25 60 39 58  
Tel. + (506) 22 62 39 27  
Fax + (506) 22 62 16 74

**Croatia**

**ifm electronic gmbh**  
Wienerbergstr. 41  
Gebäude E  
A-1120 Wien  
Tel. +43 / 1 / 617 45 00  
Fax +43 / 1 / 617 45 00 10  
info.hr@ifm.com  
www.ifm.com/hr

**Czech Republic**

**ifm electronic spol.s.r.o.**  
U Křížku 571  
252 43 Prague  
Tel. +420 / 2 / 67 990 211  
Fax +420 / 2 / 67 750 180  
info.cz@ifm.com  
www.ifm.com/cz

**Denmark**

**ifm electronic a/s**  
Ringager 4A, 1.sal tv.  
2605 Brøndby  
Tel. +45 70 20 11 08  
Fax +45 70 20 11 09  
info.dk@ifm.com  
www.ifm.com/dk

**Dominican Republic**

**WECH AUTOCONTROLES S. A.**  
Ave. Romulo Betancourt 2158  
Edificio Wech  
Urb. Renacimiento  
Santo Domingo  
Dominican Republic  
Tel.: + 1 809-531-0550  
Fax: + 1 809-531-9175  
wech@verizon.net.do  
www.wechautocontroles.com.do

**Ecuador**

**INSELEC CIA. LTDA.**  
Av. de los Arupos  
E1-202 y Pan. Norte- Km 5 ½  
Quito  
Tel. +593 2 28074- 76 - 78  
Fax +593 2 2807475  
inselec@inselec.com.ec  
www.inselec.com.ec

**Egypt**

**Egyptian Establishment  
for Electromechanical Supplies**  
Mr. Ahmed Gouda  
27 Al-Salam Street  
Al Arezona, Al Haram Road  
Giza 12111, Cairo  
Tel. +20 / 2 / 586 49 49  
Fax +20 / 2 / 586 49 49  
Mobile +20 10 10 61 791  
ahmed\_gouda97@yahoo.com

**Estonia**

**Pesmel Estonia LTD**  
Segu 4  
76505 Saue  
Estonia  
Tel.: +372 674 73 30  
Fax: +372 674 73 31  
pesmel@pesmel.ee  
www.pesmel.ee

**Finland**

**ifm electronic oy**  
Vaakatie 5  
00440 Helsinki  
Tel. +358 (0)75 329 5000  
Fax +358 (0)75 329 5010  
info.fi@ifm.com  
www.ifm.com/fin

**France**

**ifm electronic**  
Siège :  
Savoie Technolac BP226  
73374 Le Bourget du Lac  
Agence commerciale :  
Immeuble Uranus  
1-3 rue Jean Richepin  
93192 NOISY LE GRAND CEDEX  
Tél: 0820 22 30 01  
Fax: 0820 22 22 04  
info.fr@ifm.com  
www.ifm.com/fr

**Germany**

**ifm electronic gmbh**  
Friedrichstr. 1  
45128 Essen  
Tel. +49 201 24 22 0  
Fax +49 201 24 22 12 00  
info@ifm.com  
www.ifm.com/de

**Greece**

**ifm electronic monoprosopi E.P.E.**  
27, Andrea Papandreou Street  
15125 Amaroussi  
Greece  
Tel. +30 210 61 800 90  
Fax +30 210 61 994 00  
info.gr@ifm.com  
www.ifm.com/gr

**Guatemala**

**Ingenieros Civiles Electromecánicos  
Asociados, S.A. (IASA)**  
20 Calle 25-55 Zona 12  
Empresarial El Cortijo III  
Bodega No. 907,  
Guatemala City,  
Guatemala  
Tel: 502 - 24626636  
info@iasa.com.gt

**Honduras**

**R y D INDUSTRIAL**  
Bo. Paz Barahona  
11 Ave. 14 y 15 Calle  
S.O. #142  
San Pedro Sula  
+(504) 2550-3703  
+(504) 2558-9313  
ventas@rydindustrial.com

**Hungary**

**ifm electronic kft.**  
Szent Imre út 59. I.em.  
H-9028 Győr  
Tel. +36-96 / 518-397  
Fax +36-96 / 518-398  
info.hu@ifm.com  
www.ifm.com/hu

**India**

**ifm electronic India Pvt. Ltd.**  
Plot No. P-39/1  
MIDC Gokul Shirgaon  
Kolhapur – 416234  
Maharashtra State, India  
Tel. +91 / 231 / 267 27 70  
Fax +91 / 231 / 267 23 88  
info@ifm-electronic.in  
www.ifm.com/in

**Indonesia**

**PT Indoserako Sejahtera**  
Jl. P. Jayakarta 121 No. 59  
10730 Jakarta Pusat  
Tel. +62 / 21 6 24 8923  
Fax +62 / 21 6 24 8922  
iso297@dnet.net.id

**Ireland**

**ifm electronic (Ireland) Ltd.**  
No. 7, The Courtyard  
Kilcarbery Business Park  
New Nangor Road  
Clondalkin  
Dublin 22  
Tel. +353 / 1 / 461 32 00  
Fax +353 / 1 / 457 38 28  
sales\_ie@ifm.com  
www.ifm.com/ie

**Israel**

**Astragal Ltd.**  
3, Hashikma Str.  
Azur 58001  
P.O. Box 99  
Azur 58190  
Tel. +972 / 3 / 5 59 16 60  
Fax +972 / 3 / 5 59 23 40  
astragal@astragal.co.il  
www.astragal.co.il

**Italy**

**ifm electronic**  
Centro Direzionale Colleoni  
Palazzo Andromeda 2  
Via Paracelso n. 18  
20864 Agrate Brianza (MB)  
Tel. +39 (0)39-6899982  
Fax +39 (0)39-6899995  
info.it@ifm.com  
www.ifm.com/it

**Japan**

**efector co. ltd.**  
18F WBG Marive-west  
2-6-1 Nakase, Mihama-ku  
Chiba-shi, Chiba 261-7118  
info.jp@ifm.com  
www.ifm.com/jp

**Jordan**

**Al Mashreqan Trading Supplies**  
P.O.Box.851054  
11185 Swaifieh  
Amman - Jordan.  
Tel. +962 6 581 8841  
Fax +962 6 581 8892  
info@mashreqan.com

**Korea**

**ifm electronic Ltd.**  
Hyundai Liberty House 201  
Dokseodang-ro Yongsan-Gu  
140-884 Seoul  
Tel. +82 2-790-5610  
Fax +82 2-790-5613  
info.kr@ifm.com  
www.ifm.com/kr

**Korea**

**Kana Controls**  
2nd Floor Khalid Fauzan Building  
Building No. 1670  
Street No. 7, Block No. 1  
Al-Rai Industrial Area,  
P.O. Box - 25593,  
13116 Safat,  
Kuwait  
Tel.: +965-24741537  
Fax:+965-24741537  
info@kanacontrols.com  
www.kanacontrols.com

**Latvia**

**EC Systems**  
Katlakalna Str. 4A  
1073 Riga  
Latvia  
Tel.: +371 724 1231  
Fax: +371 724 8478  
aln@ecsystems.lv  
www.ecsystems.lv

**Lebanon**

**Middle East Development Co. SAL  
(MEDEVCO)**  
Medevco Building  
Jeita Main Road  
Jeita - Kesrouan  
Lebanon  
Mail address :  
P.O.Box 67  
Jounieh  
Lebanon  
Tel. +961-9-233550  
Fax +961-9-233554  
info@medevco-lebanon.com

**Lithuania**

**Elinta UAB**  
Terminalo g. 3, Biruliškių k.,  
Karmėlavos sen.  
LT-54469 Kauno raj. (Kauno LEZ)  
Lithuania  
Tel.: +370 37 351 999  
Fax: +370 37 452 780  
sales@elinta.lt  
www.elintosprekyba.lt

**Malaysia**

**ifm electronic Pte. Ltd**  
Malaysian Branch Office  
No. 2-4-2, Fourth Floor  
Tower 2 @ PFCC, Jalan Puteri 1/2  
Bandar Puteri Puchong,  
47100 Puchong, Selangor  
Tel. +603 - 8063 9522  
Fax +603 - 8063 9524  
sales.my@ifm.com  
www.ifm.com/my  
**ifm electronic**  
Asia Regional Office  
21, Jalan Kemunting  
Taman Kebun The  
80250 Johor Bahru  
Johor, West Malaysia  
Tel. +607 - 332 5022  
Fax +607 - 332 1577  
sales.my@ifm.com

**Mexico**

**ifm efector S. de R.L. de C.V.**  
Ave. Arq. Pedro Ramírez Vázquez 200-4  
Planta Baja, Col. Valle Oriente.  
San Pedro Garza García, N.L. 66269  
Tel. +52-81-8040-3535  
Fax +52-81-8040-2343  
clientes.mx@ifm.com  
www.ifm.com/mx

**Morocco**

**SOFIMED**  
137, Boulevard Moulay Ismail -  
Roches Noires  
20290 - Casablanca - MAROC  
Tel : +212 522 240 101  
Fax : +212 522 240 100  
www.sofimed.ma

**Netherlands**

**ifm electronic b.v.**  
Deventerweg 1 E  
3843 GA Harderwijk  
Tel. +31 / 341 438 438  
Fax +31 / 341 438 430  
info.nl@ifm.com  
www.ifm.com/nl

**New Zealand**

**ifm efector pty ltd.**  
Unit 13, 930 Great South Road  
Penrose, Auckland  
Tel. +64 / 95 79 69 91  
Fax +64 / 95 79 92 82  
sales.nz@ifm.com  
www.ifm.com/nz

**Nigeria**

**Automated Process Ltd**  
3rd Floor, 32 Lagos Abeokuta  
Expressway  
Near Cement Bus Stop  
Dopemu, Agege  
Lagos State, Nigeria  
Tel. + 234 / 01 / 4729 967  
Fax + 234 / 01 / 4925 865  
sales@automated-process.com  
www.automated-process.com

**Norway**

**Siv.Ing. J.F.Knudtzen AS**  
Billingstadsletta 97  
1396 Billingstad  
Postboks 160  
1378 Nesbru  
Tel. +47 / 66 98 33 50  
Fax +47 / 66 98 09 55  
firmapost@jfkknudtzen.no  
www.jfkknudtzen.no

**Oman**

**Technical Engineering Company  
LLC.**  
P.O. Box 59  
Madinat Al Sultan Qaboos  
Postal Code 115  
Sultanate of Oman  
Tel. +968 24503593  
Fax +968 24503573  
tecoman@omantel.net.om

**Panama**

**RyD Industrial Panamá**  
Av. Ricarco J. Alfaro,  
Villa de las Fuentes 2,  
Calle Principal, Casa C5  
Panamá  
PANAMÁ  
Tel. (507) 236-9121  
Tel. (507) 236-8639  
Tel. (507) 236-8640  
ventaspn@rydindustrial.com

**Peru**

**dekatec s.a.c.**  
Los Calderos 188  
Urb. Vulcano, Ate  
Lima / Peru  
Tel. +511 / 348 0293  
Tel. +511 / 348 0458  
Tel. +511 / 348 2269  
Fax +511 / 349 0110  
dkleffmann@dekatec.com.pe  
www.dekatec.com.pe

**Philippines**

**Gram Industrial, Inc.**  
Bldg. 9 Don Mariano Lim  
Industrial Complex,  
Alabang Zapote Road  
corner Concha Cruz Drive,  
Brgy. Almanza 1 Las Piñas City  
Tel. 632-8502218 / 8508496  
Fax. 632-8077173 / 8503055  
efector@gram.com.ph

**Poland**

**ifm electronic Sp.z o.o.**  
ul. Kosciuszki 175  
PL 40-524 Katowice  
Tel. +48 / 32 / 60 87 454  
Tel. +48 / 32 / 60 87 480  
Fax +48 / 32 / 60 87 455  
info.pl@ifm.com  
www.ifm.com/pl

**Portugal**

**ifm electronic s.a.**  
Parque Tecnológico S. Félix da Marinha  
Avenida Manuel Violas, 476  
4410-137 São Félix da Marinha  
Tel. +351 / 22 / 37 17 108  
Fax +351 / 22 / 37 17 110  
info.pt@ifm.com  
www.ifm.com/pt

**Romania**

**ifm electronic s.r.l.**  
Mihai Viteazu Str. Nr. 1  
Selimbar, Sibiu  
557260  
Rumänien  
Tel.: 0040 269 224550  
Fax: 0040 269 224766  
info.ro@ifm.com

**Russia**

**ifm electronic**  
lbragimova, 31, k.50  
office 808  
105318 Moscow  
Tel.: +7 (495) 921-44-14  
Fax: +7 (495) 651-82-97  
info.ru@ifm.com  
www.ifm.com/ru

**Saudi Arabia**

**Noor Al-Shomoe  
for Electric & Maintenance**  
King Khalid Street, Cross 5  
P.O. Box 2571  
Al-Khobar 31952  
Kingdom of Saudi Arabia  
Tel. +9 663 864 49 58  
Fax +9 663 894 63 41  
h.o.info@nooralshomoe.com

**Singapore**

**ifm electronic Pte. Ltd.**  
25, International Business Park  
#03-26/29 German Center  
609916 Singapore  
Tel. +6565628661  
Fax +6565628660  
sales.sg@ifm.com  
www.ifm.com/sg

**Slovakia**

**ifm electronic spol. s.r.o.**  
Rybnicna 40  
831 06 Bratislava  
Tel. +421 / 2 / 44 87 23 29  
Fax +421 / 2 / 44 64 60 42  
info.sk@ifm.com  
www.ifm.com/sk

**South Africa**

**ifm electronic (pty) Ltd**  
Shorrok House  
Route 21 Corporate Park  
Nellmapius Drive,  
Irene Ext. 30,  
Centurion 0157,  
Pretoria  
Postnet Suite 279  
Private bag X8  
Elardus Park  
0047  
Tel. +27 (0) 861 IFM RSA / 436 772  
Fax +27(0)12 450 0322  
info.za@ifm.com  
www.ifm.com/za

**Spain**

**ifm electronic s.l.**  
Parc Mas Blau  
Edificio Inbisa  
c/ Garrotxa 6-8  
08820 El Prat de Llobregat  
tel: 0034 93 479 30 80  
fax: 0034 93 479 30 86  
info.es@ifm.com  
www.ifm.com/es

**Sri Lanka**

**Isaro Automation Systems Ltd.**  
First Floor,  
400 Galle Road,Rawathawatta.  
Moratuwa  
Sri Lanka  
Tel. +94 114 216 784  
Fax. + 94 11 2644 224  
isaro@stnet.lk

**Sweden**

**ifm electronic ab**  
Drakegatan 6  
41250 Gothenburg  
Tel. växel 031-750 23 00  
Telefax 031-750 23 29  
info.se@ifm.com  
www.ifm.com/se

**Switzerland**

**ifm electronic ag**  
Altgraben 27  
4624 Härkingen  
Tel. 0800 88 80 33  
Fax 0800 88 80 39  
info.ch@ifm.com  
www.ifm.com/ch

**Thailand**

**SCM ALLIANZE CO., LTD.**  
35/21 Soi Intamara 1  
Sutthisanvinitchai Road  
Samsennai Phayathai  
BKK 10400 Thailand  
Tel: +66 02 615 4888  
contact@scma.co.th  
www.scma.co.th

**Tunesia**

**TECHNOPREST – Tunisia**  
GP1 – Km 5,5 Rte de Sousse –  
Z.I 2013 Ben Arous – Tunisia  
Tel : +216 71 389 203  
Fax : + 216 71 389 215  
technoprest@technoprest.com.tn

**Turkey**

**ifm electronic Elektrikli  
ve Elektronik Aletler  
İth.İhr.Paz.Tic.Ltd.Şti.**  
Merkez Mah. Nadide Sok.  
Anittepe Sitesi No:28  
34381 Şişli / İstanbul  
Tel. +90 / 212 / 210 5080  
Fax +90 / 212 / 221 7159  
info.tr@ifm.com  
www.ifm.com/tr

**Ukraine**

**ifm electronic**  
Mariny Raskovoj 11  
02660 Kiev  
Ukraine  
Tel. +380 44 501 8543  
Fax +380 44 501 8543  
info.ua@ifm.com  
www.ifm.com/ua

**United Arab Emirates**

**United Arab Emirates**  
Al Injazat Technical Services Est.  
P.O. Box 42895  
Al Qubaisi bldg floor 0 flat # 4  
Liwa street corner of corniche road,  
Abu Dhabi,  
United Arab Emirates  
Tel.: +971-2-6585400  
Fax: +971-2-6585401  
Mob: +971-50-6811072  
kamran@injazat.ae  
www.injazat.ae

**United Kingdom**

**ifm electronic Ltd.**  
efector House  
Kingsway Business Park  
Oldfield Road  
Hampton  
Middlesex TW12 2HD  
Tel. +44 / 20 / 8213 0000  
Fax +44 / 20 / 8213 0001  
enquiry\_gb@ifm.com  
www.ifm.com/uk

**USA**

**ifm efector, inc.**  
782 Springdale Drive  
Exton, PA 19341  
Tel. 800-441-8246  
Fax 800-329-0436  
info.us@ifm.com  
www.ifm.com/us

**Venezuela**

**Petrobornas, C.A.**  
C. C. Plaza Aeropuerto,  
Galería piso 1, Local P1-B03,  
Calle Neverí, Unare,  
Puerto Ordaz 8050,  
Estado Bolívar  
Venezuela  
Tel: + 58 286 9513382  
info@petrobornas.net  
www.petrobornas.net

**Vietnam**

**The Representative  
Office of ifm electronic GmbH  
in Ho Chi Minh City**  
7A-7th Floor,  
#467 Dien Bien Phu Street,  
Ward 25, Binh Thanh District,  
Ho Chi Minh City 700000,  
Vietnam  
Tel. +84-8-35125177  
Fax +84-8-35125178  
sales.vn@ifm.com



Visit our website:

[www.ifm.com](http://www.ifm.com)

Over 70 locations worldwide –  
at a glance at [www.ifm.com](http://www.ifm.com)

ifm electronic gmbh  
Friedrichstraße 1  
45128 Essen  
Tel. +49 / 201 / 24 22-0  
Fax +49 / 201 / 24 22-1200  
E-mail [info@ifm.com](mailto:info@ifm.com)



**ifm – close to you!**



Overview  
ifm product range:



**Position sensors**



**Sensors for  
motion control**



**Industrial imaging**



**Safety technology**



**Process sensors**



**Industrial  
communication**



**Identification systems**



**Condition monitoring  
systems**



**Systems for  
mobile machines**



**Connection  
technology**



**Accessories**